

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



(11) **EP 1 215 375 A1**

(12)

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(43) Date of publication:
19.06.2002 Bulletin 2002/25

(51) Int Cl.7: **F01N 7/18**

(21) Application number: 00961211.0

(86) International application number:
PCT/JP00/06533

(22) Date of filing: 22.09.2000

(87) International publication number:
WO 01/21943 (29.03.2001 Gazette 2001/13)

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

- **IKUMA, Tomonori**
Kabushiki Kaisha Honda GijutsuKen
Wako-shi, Saitama 351-0193 (JP)
- **TAKADA, Hideaki**
Kabushiki Kaisha Honda GijutsuKen
Wako-shi, Saitama 351-0193 (JP)

(30) Priority: 24.09.1999 JP 27088199
24.09.1999 JP 27088299


(71) Applicant: **Honda Giken Kogyo Kabushiki Kaisha**
Minato-ku, Tokyo 107-8556 (JP)

**(74) Representative: Melzer, Wolfgang, Dipl.-Ing. et al
Patentanwälte
Mitscherlich & Partner,
Sonnenstrasse 33
80331 München (DE)**

(72) Inventors:
 • **YOSHIDA, Hiroyuki**
 Kabushiki Kaisha Honda Gijutsu K
 Wako-shi, Saitama 351-0193 (JP)

(54) EXHAUST GAS PASSAGE STRUCTURE OF OUTBOARD ENGINE

(57) A split face 48₁ of an exhaust passage-defining member 48 is coupled to a split face 41₂ provided at a rear portion of an oil case 41 interposed between an engine block 11 and an extension case 42. A main exhaust gas expansion chamber e₃ and a subsidiary exhaust gas expansion chamber e₇ are defined between the exhaust passage-defining member 48 and the oil case 41, so that an exhaust gas supplied from a first exhaust passage e₁ in the oil case 41 is discharged into a second exhaust passage e₅ in the oil case 41 via the main exhaust gas expansion chamber e₃. A portion of the exhaust gas in the main exhaust gas expansion chamber e₃ is passed through a communication bore e₆ and the subsidiary exhaust gas expansion chamber e₇ and discharged from an exhaust outlet e₈ into the air. Thus, the exhaust gas expansion chambers e₃ and e₇ can be exposed for the maintenance only by separating the exhaust passage-defining member 48 from the oil case 41 without disassembling of the oil case 41, leading to a remarkable enhancement in maintenance property.

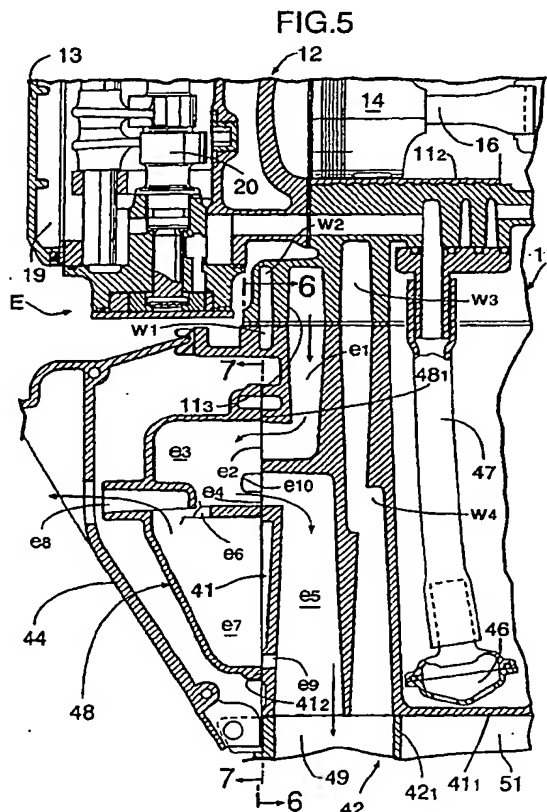

Description

FIELD OF THE INVENTION

[0001] The present invention relates to an exhaust passage structure in an outboard engine system in which at least a portion of an exhaust passage is integrally defined in a case member having a drive shaft accommodated therein for transmitting a driving force from an engine to a propeller, and to an exhaust passage structure in an outboard engine system in which a catalytic converter for purifying an exhaust gas discharged from the engine is mounted in the exhaust passage for guiding the exhaust gas.

BACKGROUND ART

[0002] In general, an outboard engine system includes an engine room in which an engine is accommodated, and a case member extending downwards from the engine room to accommodate a drive shaft driven by the engine, so that an exhaust gas discharged from the engine is guided downwards within the case member and discharged into water in order to enhance the silencing effect. During idling operation of the engine, a portion of the exhaust gas is diverted and discharged into the air, thereby providing a reduction in back pressure.

[0003] There is such a conventionally known outboard engine system described in Japanese Patent Application Laid-open No.8-100625, in which an exhaust passage having a silencing effect is formed by an exhaust gas expansion chamber having an outlet and an inlet.

[0004] It should be noted here that if the exhaust gas expansion chamber is integrally formed in the case member in the outboard engine system, the following problem is encountered: It is necessary to change the design of the entire case member or to replace the entire case member, which is a large-sized part, in order to regulate the silencing effect, resulting in a remarkable increase in cost.

[0005] The case member in the outboard engine system is generally comprised of a cylindrical extension case, a mount case coupled to an upper end of the extension case to support an engine block, and a gear case coupled to a lower end of the extension case. If the exhaust gas expansion chamber is integrally formed in the case member, it is necessary to disassemble the case member for the purpose of carrying out the maintenance of the exhaust gas expansion chamber. However, the following problem is encountered: The cases forming the case member are large-sized parts each having a large weight and moreover, are supported on a mounting bracket for supporting the outboard engine system on a hull through an elastic mount device. For this reason, to separate the cases, an extremely troublesome operation is required, resulting in a reduction

in maintenance property.

[0006] Particularly, if the outboard engine system includes a 4-cycle engine, and an oil pan is provided within the case member, the following problem arises: The oil pan and the exhaust gas expansion chamber interfere with each other and thus, it is difficult to sufficiently ensure volumes of the oil pan and the exhaust gas expansion chamber.

[0007] An outboard engine system is known from Japanese Patent Application Laid-open No.8-312365, which includes a catalytic converter mounted in an exhaust passage provided in a case member for purifying an exhaust gas. In this outboard engine system, the catalytic converter includes an upstream introducing exhaust pipe and a downstream discharging exhaust pipe, and a mounting flange at an upper end of the introducing exhaust pipe is fixed by bolting within the case member.

[0008] It should be noted here that in the outboard engine system described in Japanese Patent Application Laid-open No.8-312365, the case member is comprised of a cylindrical extension case, a mount case coupled to an upper end of the extension case to support an engine block, and a gear case coupled to a lower end of the extension case. The catalytic converter is accommodated within the extension case and hence, to subject the catalytic converter to the maintenance, it is necessary to separate the mount case from the extension case. However, the following problem is encountered: The mount case and the extension case are large-sized parts each having a large weight and moreover, they are supported on the mounting bracket for supporting the outboard engine system on a hull through an elastic mount device. For this reason, an extremely troublesome operation is required to separate the mount case and the extension case from each other, resulting in a reduction in maintenance property.

DISCLOSURE OF THE INVENTION

[0009] The present invention has been accomplished with the above circumstances in view, and it is a first object of the present invention to enhance the exhaust silencing effect, while ensuring the maintenance property of the exhaust passage in the outboard engine system.

[0010] It is also a second object of the present invention to enhance the maintenance property of the catalytic converter mounted in the exhaust passage in the outboard engine system.

[0011] To achieve the first object, according to the present invention, there is proposed an exhaust passage structure in an outboard engine system, in which at least a portion of an exhaust passage is integrally formed in a case member having a drive shaft accommodated therein for transmitting a driving force from an engine to a propeller, characterized in that openings of the exhaust passage are defined in a sidewall of the case member, and an exhaust passage forming an ex-

haust silencing portion is defined between the case member and a lid detachably coupled to cover the openings.

[0012] With the above arrangement, the exhaust passage forming the exhaust silencing portion is defined between the case member and the lid detachably coupled to cover the opening in the sidewall of the case member. Therefore, the degree of freedom for designing the exhaust silencing portion can be increased to enhance the exhaust silencing effect, as compared with a case where the exhaust silencing portion is formed within the case member. Moreover, the exhaust passage can be exposed for maintenance only by separating the lid from the case member without disassembling of the case member, leading to a remarkable enhancement in maintenance property.

[0013] To achieve the first object, in addition to the above arrangement, there is proposed an exhaust passage structure in an outboard engine system, wherein an oil pan for storing a lubricating oil for the engine is integrally formed within the case member.

[0014] With the above arrangement, even when the oil pan for storing the lubricating oil for the engine is integrally formed within the case member, the maintenance of the exhaust passage can be carried out only by separating the lid from the case member, without being hindered by the oil pan. Moreover, it is possible to avoid the interference of the oil pan and the exhaust silencing portion with each other to sufficiently ensure volumes of the oil pan and the exhaust silencing portion.

[0015] To achieve the second object, according to the present invention, there is proposed an exhaust passage structure in an outboard engine system in which a catalytic converter for purifying an exhaust gas discharged from an engine is mounted in an exhaust passage for guiding the exhaust gas, characterized in that at least a portion of the exhaust passage is integrally formed in a case member having a drive shaft accommodated therein for transmitting a driving force from the engine to a propeller; a connection into which the exhaust passage opens is formed in a sidewall of the case member; and the catalytic converter is disposed in a space surrounded by the case member and a lid detachably coupled to the connection to permit the exhaust gas to flow.

[0016] With the above arrangement, the catalytic converter is disposed in the space surrounded by the case member and the lid detachably coupled to the connection in the sidewall of the case member. Therefore, the catalytic converter can be exposed for the maintenance only by separating the lid from the case member without disassembling of the case member, leading to a remarkable enhancement in maintenance property.

[0017] To achieve the second object, in addition to the above arrangement, there is proposed an exhaust passage structure in an outboard engine system, wherein the catalytic converter is supported on the lid.

[0018] With the above arrangement, the catalytic con-

verter is supported on the lid. Therefore, the handleability and assemblability of the catalytic converter can be enhanced by previously assembling the catalytic converter to the lid to form a subassembly, but also the catalytic converter can be separated from the case member together with the lid, leading to a further enhancement in maintenance property.

[0019] To achieve the second object, in addition to the above arrangement, there is proposed an exhaust passage structure in an outboard engine system, wherein the catalytic converter is supported on the case member.

[0020] With the above arrangement, the catalytic converter is supported on the case member. Therefore, even if the lid is separated from the case member, the exhaust passage leading to the catalytic converter is not cut off and hence, the seal structure for the exhaust passage can be simplified.

[0021] To achieve the second object, according to the present invention, there is proposed an exhaust passage structure in an outboard engine system in which a catalytic converter for purifying an exhaust gas discharged from a 4-cycle engine is mounted in an exhaust passage for guiding the exhaust gas, characterized in that at least a portion of the exhaust passage and an oil pan for restoring a lubricating oil for the engine are integrally formed in a case member having a drive shaft accommodated therein for transmitting a driving force from the engine to a propeller; a connection into which the exhaust passage opens is formed in a sidewall of the case member; and the catalytic converter is disposed in a space surrounded by the case member and a lid detachably coupled to the connection to permit the exhaust gas to flow.

[0022] With the above arrangement, the catalytic converter is disposed in the space surrounded by the case member and the lid detachably coupled to the connection on the sidewall of the case member. Therefore, the catalytic converter can be exposed for the maintenance only by separating the lid from the case member without disassembling of the case member, leading to a remarkable enhancement in maintenance property. Particularly, even when the oil pan for storing the lubricating oil for the engine is integrally formed in the case member, the maintenance property of the catalytic converter cannot be impeded by the oil pan.

[0023] An oil case 41 in embodiments corresponds to the case member of the present invention; an exhaust passage-defining member 48 in the embodiments corresponds to the lid of the present invention; and communication bores e_2 and e_4 in the embodiment corresponds to the openings of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024]

Figs.1 to 7 show a first embodiment of the present

invention, wherein

Fig.1 is a side view of the entire arrangement of an outboard engine system;

Fig.2 is an enlarged sectional view of an essential portion shown in Fig.1;

Fig.3 is a sectional view taken along a line 3-3 in Fig.2;

Fig.4 is an enlarged view taken along a line 4-4 in Fig.1;

Fig.5 is an enlarged view of the essential portion shown in Fig.2;

Fig.6 is a view taken along a line 6-6 in Fig.5; and

Fig.7 is a view taken along a line 7-7 in Fig.5.

Figs.8 to 10 show a second embodiment, wherein Fig.8 is a view similar to Fig.5, but showing the second embodiment;

Fig.9 is a view taken along a line 9-9 in Fig.8; and

Fig.10 is a view taken along a line 10-10 in Fig.8.

Figs.11 to 15 show a third embodiment of the present invention, wherein

Fig.11 is a view similar to Fig.5, but showing the third embodiment;

Fig.12 is a view taken in a line 12-12 in Fig.11;

Fig.13 is a view taken along a line 13-13 in Fig.11;

Fig.14 is a side view of a catalytic converter; and

Fig.15 is view taken in the direction of an arrow 15 in Fig.14.

BEST MODE FOR CARRYING OUT THE INVENTION

[0025] A first embodiment of the present invention will now be described with reference to Figs.1 to 7.

[0026] As shown in Figs.1 to 3, a 2-cylinder and 4-cycle engine E mounted at an upper portion of an outboard engine system O includes an engine block 12 integrally provided with a crankcase 11₁ and two upper and lower cylinder bores 11₂, 11₂, a cylinder head 12 coupled to the engine block 11, and a head cover 13 coupled to the cylinder head 12. Two pistons 14, 14 slidably received in the two cylinder bores 11₂, 11₂ defined in the engine block 11 are connected through connecting rods 16, 16 to a crankshaft 15 supported in the engine block 11.

[0027] A generator 17 and a recoil starter 18 are mounted coaxially on an end of the crankshaft 15 protruding upwards from the engine block 11. A camshaft 20 is supported in a valve-operating chamber 19 defined between the cylinder head 12 and the head cover 13, and a cam pulley 21 mounted at an upper end of the camshaft 20 and a crank pulley 22 mounted at an upper portion of the crankshaft 15 are connected to each other by a timing belt 23. An intake valve 26 and an exhaust valve 27 for opening and closing an intake port 24 and an exhaust port 25 defined in the cylinder head 12 respectively are connected to the camshaft 20 through an intake rocker arm 28 and an exhaust rocker arm 29, respectively. An intake silencer 30, a choke valve 31 and a variable Venturi-type carburetor 32 disposed on a right side of the engine E are connected to the intake port 24.

[0028] An axis of the crankshaft 15 is disposed vertically, and axes of the cylinder bores 11₂, 11₂ are disposed longitudinally, so that a portion of each cylinder bore 11₂ on the side of the crankcase 11₁ faces forwards and a portion of each cylinder bore 11₂ on the side of the cylinder heads 12 faces rearwards. The crank phases of the two pistons 14, 14 are the same as each other, and the ignition timings provided by the pistons 14, 14 are deviated from each other by 360°. Counterweights 15₁ having a balance rate of 100 % for opposing the reciprocal movement mass of the pistons 14, 14 are mounted on the crankshaft 15.

[0029] An upper surface of an oil case 41 is coupled to a lower surface of the engine E having the above-described structure, and an upper surface of an extension case 42 is coupled to a lower surface of the oil case 41. An upper surface of a gear case 43 is coupled to a lower surface of the extension case 42. An outer periphery of the oil case 41 and an outer periphery of a lower half of the engine E are covered with an undercover 44 coupled to an upper end of the extension case 42, and an upper half of the engine E is covered with an engine cover 45 coupled to an upper end of the undercover 44.

[0030] As can be seen from Fig.2, the oil case 41 is integrally provided with an oil pan 41₁, and a suction pipe 47 provided with an oil strainer 46 is accommodated in the oil pan 41₁. An exhaust passage-defining member 48 is coupled to a rear surface of the engine case 41, and an exhaust gas expansion chamber 49 is defined in the extension case 42 through a partition wall 42₁.

[0031] A drive shaft 50 connected to a lower end of the crankshaft 15 is passed through the oil case 41, extends downwards within a drive shaft chamber 51 defined in the extension case 42, and is connected through a forward/backward changeover mechanism 54 to a front end of a propeller shaft 53 which is provided at its rear end with a propeller 52 and supported longitudinally on the gear case 43.

[0032] A mounting bracket 55 for detachably mounting the outboard engine system O to a hull S includes an inverted J-shaped mounting bracket body 56 and a set screw 57 threadedly engaged with the mounting bracket body 56. A swinging arm 59 is pivotally supported at its front end on the mounting bracket body 56 through a pivot pin 58, and a pipe-shaped swivel case 60 is integrally coupled to a rear end of the swinging arm 59. A large number of pinholes 56₁ are provided in the mounting bracket body 56, so that the tilting angle of the outboard engine system O about the pivot pin 58 can be regulated by inserting a pin 61 through a pinhole made in a locking plate 60₁ fixed to the swivel case 60 and any one of the pinholes 56₁ in the mounting bracket body 56.

[0033] A swivel shaft 62 relatively rotatably fitted in the swivel case 60 includes a mount frame 63 and a mount block 64 at its upper and lower ends, respectively. The upper mount frame 63 is resiliently connected to the

oil case 41 through a pair of left and right upper mounts 65, 65, and the lower mount block 64 is resiliently connected to the extension case 42 through a lower mount 66. A steering handlebar 67 is fixed to a front end of the oil case 41, so that the oil case 41 can be swung laterally about the swivel shaft 62 to steer the outboard engine system O by grasping the steering handlebar 67 to operate it laterally.

[0034] As can be seen from Figs.2 and 4, cooling water pumped by a cooling water pump (not shown) is supplied cooling-water passages w_1 and w_2 defined in a mating surfaces of the engine block 11 and the oil case 41, and is bifurcated therefrom and supplied to the engine block 11 and the cylinder head 12 (see an arrow b in Fig.4). The cooling water, which has cooled the engine block 11 and the cylinder head 12, is supplied to a cooling-water passage w_3 defined in a lower surface of the engine block 11 (see an arrow c in Fig.4), and is passed therefrom through a cooling-water passage w_4 defined in the oil case 41 and is discharged into the extension case 42.

[0035] As can be seen from Figs.5 to 7, the exhaust passage-defining member 48 is coupled to the oil case 41 by six bolts 71 in a state in which a split face 48₁ formed in a front surface of the exhaust passage-defining member 48 is in abutment against a split face 41₂ formed on the rear surface of the oil case 41. An exhaust gas discharged from the exhaust port 25 in the engine E flows through a main exhaust passage 11₃ defined in the engine block 11 into a first main exhaust passage e_1 defined in the oil case 41 (see an arrow a in Fig.4) and then flows therefrom through a communication bore e_2 into a main exhaust gas expansion chamber e_3 defined between the exhaust passage-defining member 48 and the oil case 41. The exhaust gas in the main exhaust gas expansion chamber e_3 flows through a communication bore e_4 into a second main exhaust passage e_5 defined in the oil case 41; flows therefrom via the exhaust gas expansion chamber 49 defined in the extension case 42, the inside of the gear case 43 and a hollow around a propeller shaft 53 (which will be described hereinafter), and is discharged into the outside water. On the other hand, a portion of the exhaust gas in the main exhaust gas expansion chamber e_3 in the exhaust passage-defining member 48 flows through a communication bore e_6 into a subsidiary exhaust gas expansion chamber e_7 defined between the exhaust passage-defining member 48 and the oil case 41, and is discharged therefrom through an exhaust gas outlet e_8 into the air. A drainage bore e_9 is defined in a lower end of the subsidiary exhaust gas expansion chamber e_7 for discharging water accumulated in the subsidiary exhaust gas expansion chamber e_7 into the second main exhaust passage e_5 in the oil case 41. The main exhaust gas expansion chamber e_3 and the subsidiary exhaust gas expansion chamber e_7 communicate with each other through a pressure relief bore e_{10} .

[0036] The main exhaust gas expansion chamber e_3

and the subsidiary exhaust gas expansion chamber e_7 are defined between the oil case 41 and the exhaust passage-defining member 48 coupled to a sidewall of the oil case 41, as described above and hence, the degree of freedom for designing the exhaust gas expansion chambers can be increased to enhance the exhaust silencing effect, as compared with a case where exhaust gas expansion chambers are defined in the narrow oil case 41. Moreover, the main exhaust gas expansion chamber e_3 and the subsidiary exhaust gas expansion chamber e_7 can be exposed for the maintenance only by separating the exhaust passage-defining member 48 from the oil case 41 without separation of the oil case 41 from the engine block 11 and the extension case 42, leading to a remarkably enhanced maintenance property. Further, the main exhaust gas expansion chamber e_3 and the subsidiary exhaust gas expansion chamber e_7 cannot interfere with the oil pan 41₁ mounted within the oil case 41 and hence, it is possible to reconcile the ensuring of a volume of the oil pan 41₁ and the ensuring of volumes of the main exhaust gas expansion chamber e_3 and the subsidiary exhaust gas expansion chamber e_7 .

[0037] Next, a second embodiment of the present invention will now be described with reference to Figs.8 to 10.

[0038] The second embodiment is different in an exhaust passage structure from the first embodiment. An exhaust gas discharged from the exhaust port 25 flows through a main exhaust passage 11₃ defined in the engine block 11 into a first main exhaust gas passage e_1 defined in the oil case 41, and flows therefrom through a communication bore e_2 into a main exhaust gas expansion chamber e_3 defined between the exhaust passage-defining member 48 and the oil case 41. The exhaust gas in the main exhaust gas expansion chamber e_3 flows through a communication bore e_4 into a second main exhaust passage e_5 defined in the oil case 41 and is discharged therefrom into the exhaust gas expansion chamber 49 in the extension case 42.

[0039] A subsidiary exhaust passage e_{11} is defined in parallel on the left of the second main exhaust passage e_5 to extend upwards from the exhaust gas expansion chamber 49 in the extension case 42. The subsidiary exhaust passage e_{11} communicates with a first subsidiary exhaust gas expansion chamber e_{13} defined between the exhaust passage-defining member 48 and the oil case 41 through a communication bore e_{12} . The first subsidiary exhaust gas expansion chamber e_{13} communicates with a second subsidiary exhaust gas expansion chamber e_{15} defined between the oil case 41 and the exhaust passage-defining member 48 via a narrow portion e_{14} defined between the oil case 41 and the exhaust passage-defining member 48 and having a throttling effect. The second subsidiary exhaust gas expansion chamber e_{15} communicates with an exhaust outlet e_8 provided in the rear surface of the exhaust passage-defining member 48. A lower end of the second

subsidiary exhaust gas expansion chamber e_{15} communicates with the second main exhaust passage e_5 through a drainage bore e_9 , and the main exhaust gas expansion chamber e_3 and the first subsidiary exhaust gas expansion chamber e_{13} communicate with each other through a negative-pressure relief bore e_{10} defined in the exhaust passage-defining member 48.

[0040] Even according to the second embodiment, functions and effects similar to those in the first embodiment can be achieved. Particularly, the exhaust silencing effect can be further enhanced, because the first subsidiary exhaust gas expansion chamber e_{13} and the second subsidiary exhaust gas expansion chamber e_{15} are provided within the exhaust passage-defining member 48 with the narrow portion e_{14} having the throttling effect interposed therebetween.

[0041] A third embodiment of the present invention will now be described with reference to Figs.11 to 15.

[0042] As can be seen from Figs.11 to 13, an exhaust passage-defining member 48 is coupled to an oil case 41 by six bolts 71 in a state in which a split face 48_1 formed on a front surface of the exhaust passage-defining member 48 is in abutment against a split face 41_2 formed on a rear surface of the oil case 41. A cylindrical catalytic converter-supporting portion 48_2 with upper and lower surfaces opened is formed within the exhaust passage-defining member 48, and a catalytic converter 72 is supported in the catalytic converter-supporting portion 48_2 .

[0043] As can be seen from Figs.14 and 15, the catalytic converter 72 includes a catalyst carrier 73 formed into a columnar shape and having a honeycomb section, a cylindrical case 74 having the catalyst carrier 73 accommodated therein, and a flange 75 which closes an upper surface of the cylindrical case 74. The catalytic converter 72 is fixed by fitting the cylindrical case 74 into the catalytic converter-supporting portion 48_2 of the exhaust passage-defining member 48 from above and fastening two bolts 76, 76 passed through the flange 75 to the catalytic converter-supporting portion 48_2 . An exhaust gas inlet 74_1 is defined in one side of an upper portion of the cylindrical case 74, and an exhaust gas outlet 74_2 is defined in a lower surface of the cylindrical case 74.

[0044] An exhaust gas discharged from the exhaust port 25 in the engine E flows through a main exhaust passage 11_3 defined in the engine block 11 into a first main exhaust passage f_1 defined in the oil case 41, and flows therefrom through a communication bore f_2 defined in the oil case 41, a second main exhaust passage f_3 defined in the exhaust passage-defining member 48 and the exhaust gas inlet 74_1 in the cylindrical case 74 of the catalytic converter 72 into a space f_4 above the catalyst carrier 73. The exhaust gas passed from the space f_4 downwards through the catalyst carrier 73 and thus purified flows through the exhaust gas outlet 74_2 in the cylindrical case 74, an opening in a lower surface of the catalytic converter-supporting portion 48_2 into a

main exhaust gas expansion chamber f_5 defined between the oil case 41 and the exhaust passage-defining member 48, and further flows from an upper portion of the main exhaust gas expansion chamber f_5 through a communication bore f_6 defined in the oil case 41 and a third main exhaust passage f_7 defined in the oil case 41, and is discharged into the exhaust gas expansion chamber 49 in the extension case 42.

[0045] A subsidiary exhaust passage f_8 is defined in parallel on the left of the third main exhaust passage f_7 to extend upwards from the exhaust gas expansion chamber 49 in the extension case 42. The exhaust gas flowing upwards in the subsidiary exhaust passage f_8 flows through a communication bore f_9 defined in the oil case 41, a first subsidiary exhaust gas expansion chamber f_{10} defined between the oil case 41 and the exhaust passage-defining member 48, a narrow portion f_{11} having a throttling effect and a second subsidiary exhaust gas expansion chamber f_{12} , and is discharged into the air through an exhaust outlet f_{13} provided in the rear surface of the exhaust passage-defining member 48. A lower end of the main exhaust gas expansion chamber f_5 communicates with the third main exhaust passage f_7 through a drainage bore f_{14} , and the main exhaust gas expansion chamber f_5 and the first subsidiary exhaust gas expansion chamber f_{10} communicate with each other through a negative-pressure relief bore f_{15} defined in the exhaust passage-defining member 48.

[0046] To carry out the maintenance of the catalytic converter 72, first, the undercover 44 is removed, and the exhaust passage-defining member 48 fixed by the six bolts 71 to the rear surface of the oil case 41 is separated. Then, the catalytic converter 72 fixed by the two bolts 76, 76 is separated from the exhaust passage-defining member 48, whereby the maintenance of the catalytic converter 72 can be carried out.

[0047] The catalytic converter 72 is disposed in the space surrounded by the oil case 41 and the exhaust passage-defining member 48 detachably mounted to the rear surface of the oil case 41, as described above, and hence, the catalytic converter 72 can be exposed only by removing the exhaust passage-defining member 48 from the oil case 41. Therefore, the catalytic converter 72 can be subjected simply to the maintenance without conduction of a troublesome operation for separating the engine block 11 and the extension case 42 from the oil case 41. If the catalytic converter 72 is mounted within the oil case 41, it is difficult to ensure a space for the maintenance of the catalytic converter 72, because the oil pan 41_1 is a hindrance. In the present embodiment, however, the catalytic converter 72 can be exposed and subjected to the efficient maintenance so as not to be hindered by the oil pan 41_1 .

[0048] Further, the catalytic converter 72 is supported on the exhaust passage-defining member 48 and hence, a subassembly can be constructed by the catalytic converter 72 and the exhaust passage-defining member 48. As a result, the catalytic converter 72 can

be separated together with the exhaust passage-supporting member 48 from the inner case 41, leading to not only a further enhancement in maintenance property but also an enhancement in handleability and assembly of the catalytic converter 72.

[0049] Although the embodiments of the present invention have been described in detail, it will be understood that various modifications in design may be made without departing from the subject matter of the invention defined in claims.

[0050] For example, the catalytic converter 72 disposed in the space surrounded by the oil case 41 and the exhaust passage-defining member 48 is supported or the exhaust passage-defining member 48 in the third embodiment, but it can be supported on the oil case 41. With such arrangement, even if the exhaust passage-defining member 48 is separated from the oil case 41, the exhaust passage leading to the catalytic converter 72 is not cut off and hence, the seal structure for the exhaust passage can be simplified.

INDUSTRIAL APPLICABILITY

[0051] As described above, the exhaust passage structure in the outboard engine system according to the present invention is preferably applicable to an outboard engine system in which at least a portion of an exhaust passage is integrally defined in a case member 41 having a drive shaft 50 accommodated therein for transmitting a driving force from an engine E to a propeller 52, and to an outboard engine system in which a catalytic converter 72 for purifying an exhaust gas discharged from an engine E is mounted in an exhaust passage for guiding the exhaust gas.

Claims

1. (amended) An exhaust passage structure in an outboard engine system, in which at least a portion of an exhaust passage is integrally formed in a case member (41) having a drive shaft (50) accommodated therein for transmitting a driving force from an engine (E) to a propeller (52),

characterized in that openings (e_2 , e_4) of said exhaust passage are defined in a sidewall of said case member (41) which is disposed under an engine block (11), and an exhaust passage forming an exhaust silencing portion is defined between said case member (41) and a lid (48) detachably coupled to cover said openings (e_2 , e_4).

2. An exhaust passage structure in an outboard engine system according to claim 1, wherein an oil pan (41₁) for storing a lubricating oil for the engine (E) is integrally formed within said case member (41).

3. (amended) An exhaust passage structure in an out-

board engine system in which a catalytic converter (72) for purifying an exhaust gas discharged from an engine (E) is mounted in an exhaust passage for guiding the exhaust gas,

characterized in that at least a portion of the exhaust passage is integrally formed in a case member (41) which is disposed under an engine block (11) to accommodate a drive shaft (50) therein for transmitting a driving force from the engine (E) to a propeller (52); a connection into which said exhaust passage opens is formed in a side wall of said case member (41); and said catalytic converter (72) is disposed in a space surrounded by the case member (41) and a lid (48) detachably coupled to said connection to permit the exhaust gas to flow.

4. An exhaust passage structure in an outboard engine system according to claim 3, wherein said catalytic converter (72) is supported on said lid (48).

5. An exhaust passage structure in an outboard engine system according to claim 3, wherein said catalytic converter (72) is supported on said case member (41).

6. (amended) An exhaust passage structure in an outboard engine system in which a catalytic converter (72) for purifying an exhaust gas discharged from a 4-cycle engine (E) is mounted in an exhaust passage for guiding the exhaust gas,

characterized in that at least a portion of the exhaust passage and an oil pan (41₁) for restoring a lubricating oil for the engine (E) are integrally formed in a case member (41) which is disposed under an engine block (11) to accommodate a drive shaft (50) therein for transmitting a driving force from the engine (E) to a propeller (52); a connection into which said exhaust passage opens is formed in a sidewall of said case member (41); and said catalytic converter (72) is disposed in a space surrounded by said case member (41) and a lid (48) detachably coupled to said connection to permit the exhaust gas to flow.

Amended claims under Art. 19.1 PCT

1. (amended) An exhaust passage structure in an outboard engine system, in which at least a portion of an exhaust passage is integrally formed in a case member (41) having a drive shaft (50) accommodated therein for transmitting a driving force from an engine (E) to a propeller (52),

characterized in that openings (e_2 , e_4) of said exhaust passage are defined in a sidewall of said case member (41) which is disposed under an engine block (11), and an exhaust passage forming an exhaust silencing portion is defined between

said case member (41) and a lid (48) detachably coupled to cover said openings (e₂, e₄).

2. An exhaust passage structure in an outboard engine system according to claim 1, wherein an oil pan (41₁) for storing a lubricating oil for the engine (E) is integrally formed within said case member (41). 5

3. (amended) An exhaust passage structure in an outboard engine system in which a catalytic converter (72) for purifying an exhaust gas discharged from an engine (E) is mounted in an exhaust passage for guiding the exhaust gas, 10

characterized in that at least a portion of the exhaust passage is integrally formed in a case member (41) which is disposed under an engine block (11) to accommodate a drive shaft (50) therein for transmitting a driving force from the engine (E) to a propeller (52); a connection into which said exhaust passage opens is formed in a side wall of said case member (41); and said catalytic converter (72) is disposed in a space surrounded by the case member (41) and a lid (48) detachably coupled to said connection to permit the exhaust gas to flow. 15 20 25


4. An exhaust passage structure in an outboard engine system according to claim 3, wherein said catalytic converter (72) is supported on said lid (48).

5. An exhaust passage structure in an outboard engine system according to claim 3, wherein said catalytic converter (72) is supported on said case member (41). 30

6. (amended) An exhaust passage structure in an outboard engine system in which a catalytic converter (72) for purifying an exhaust gas discharged from a 4-cycle engine (E) is mounted in an exhaust passage for guiding the exhaust gas, 35

characterized in that at least a portion of the exhaust passage and an oil pan (41₁) for restoring a lubricating oil for the engine (E) are integrally formed in a case member (41) which is disposed under an engine block (11) to accommodate a drive shaft (50) therein for transmitting a driving force from the engine (E) to a propeller (52); a connection into which said exhaust passage opens is formed in a sidewall of said case member (41); and said catalytic converter (72) is disposed in a space surrounded by said case member (41) and a lid (48) detachably coupled to said connection to permit the exhaust gas to flow. 40 45 50 55

FIG.1

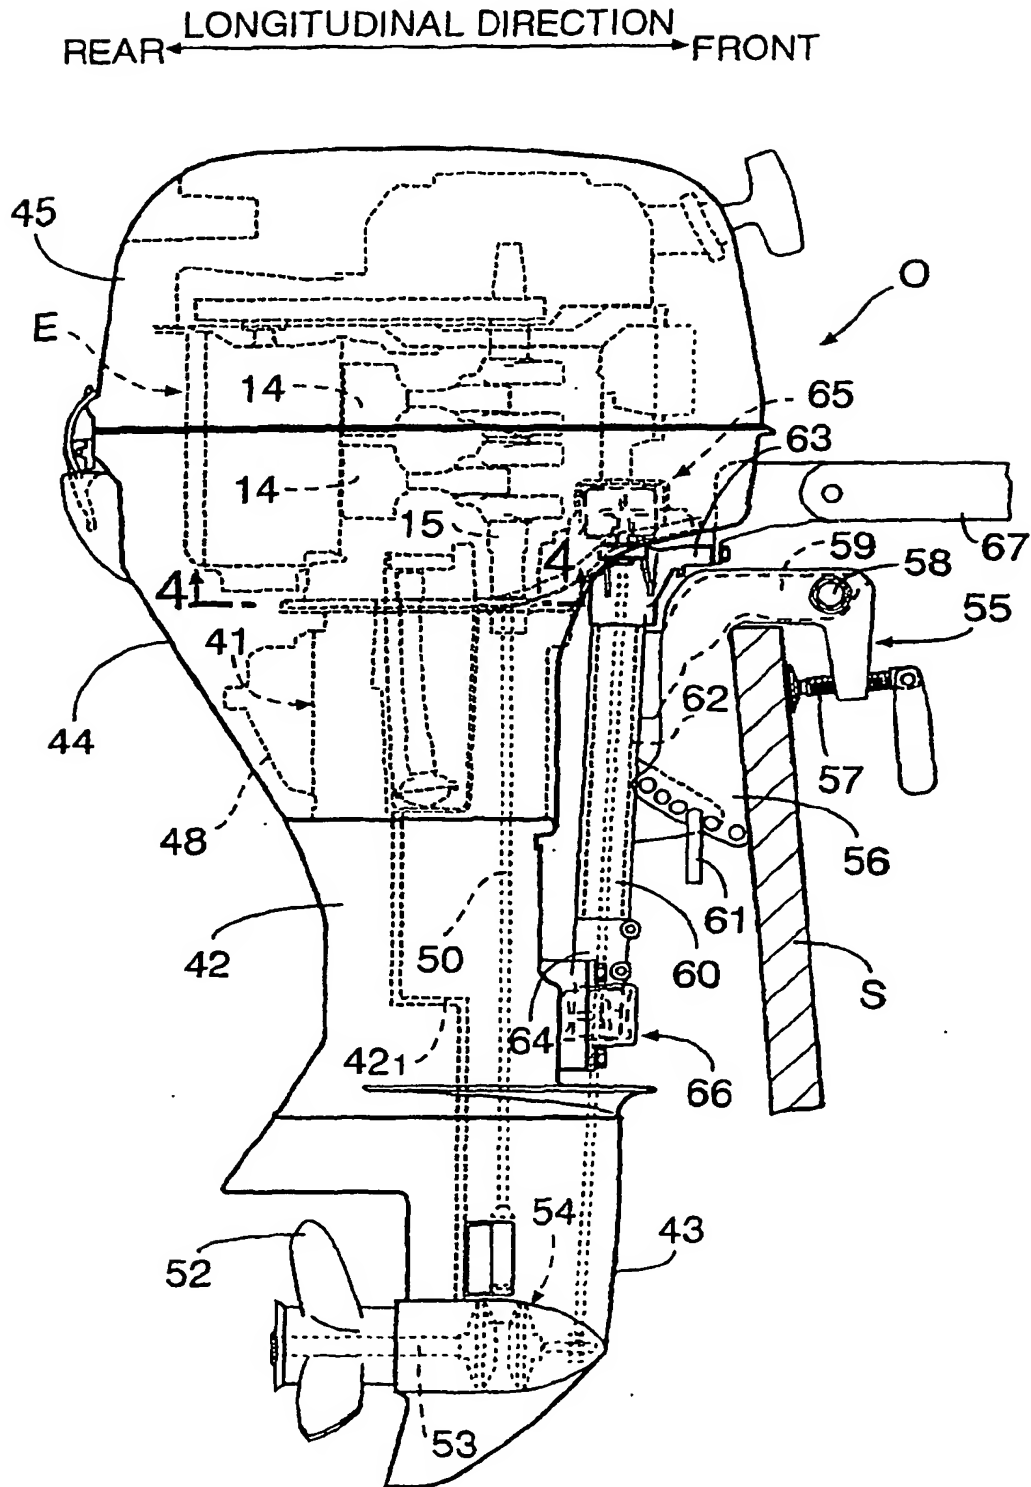

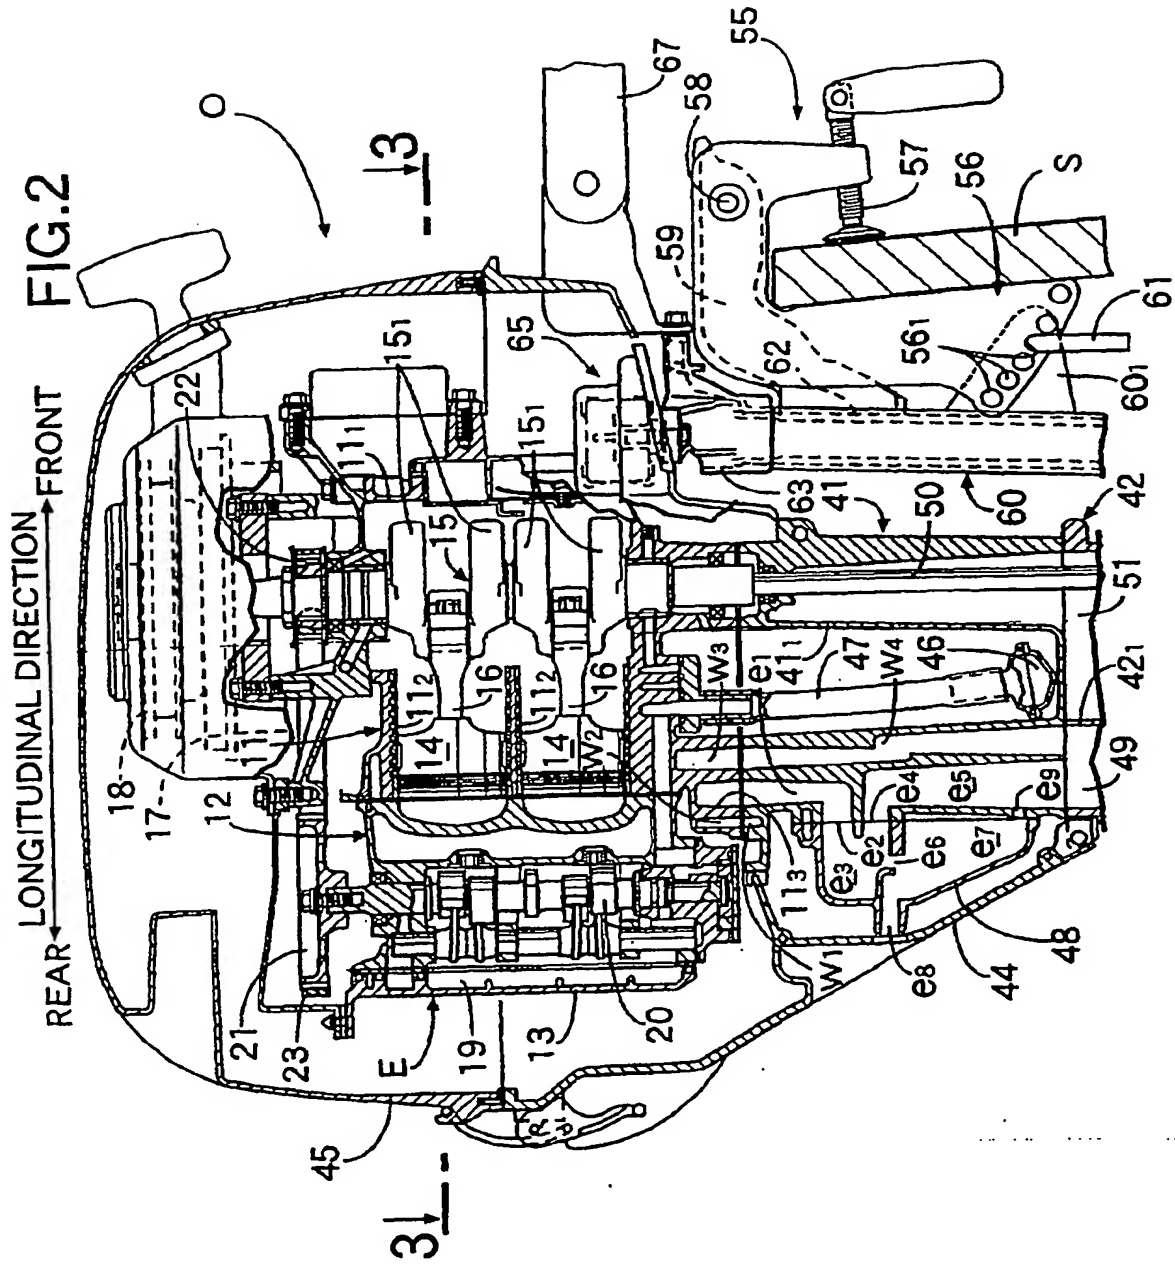


FIG.3

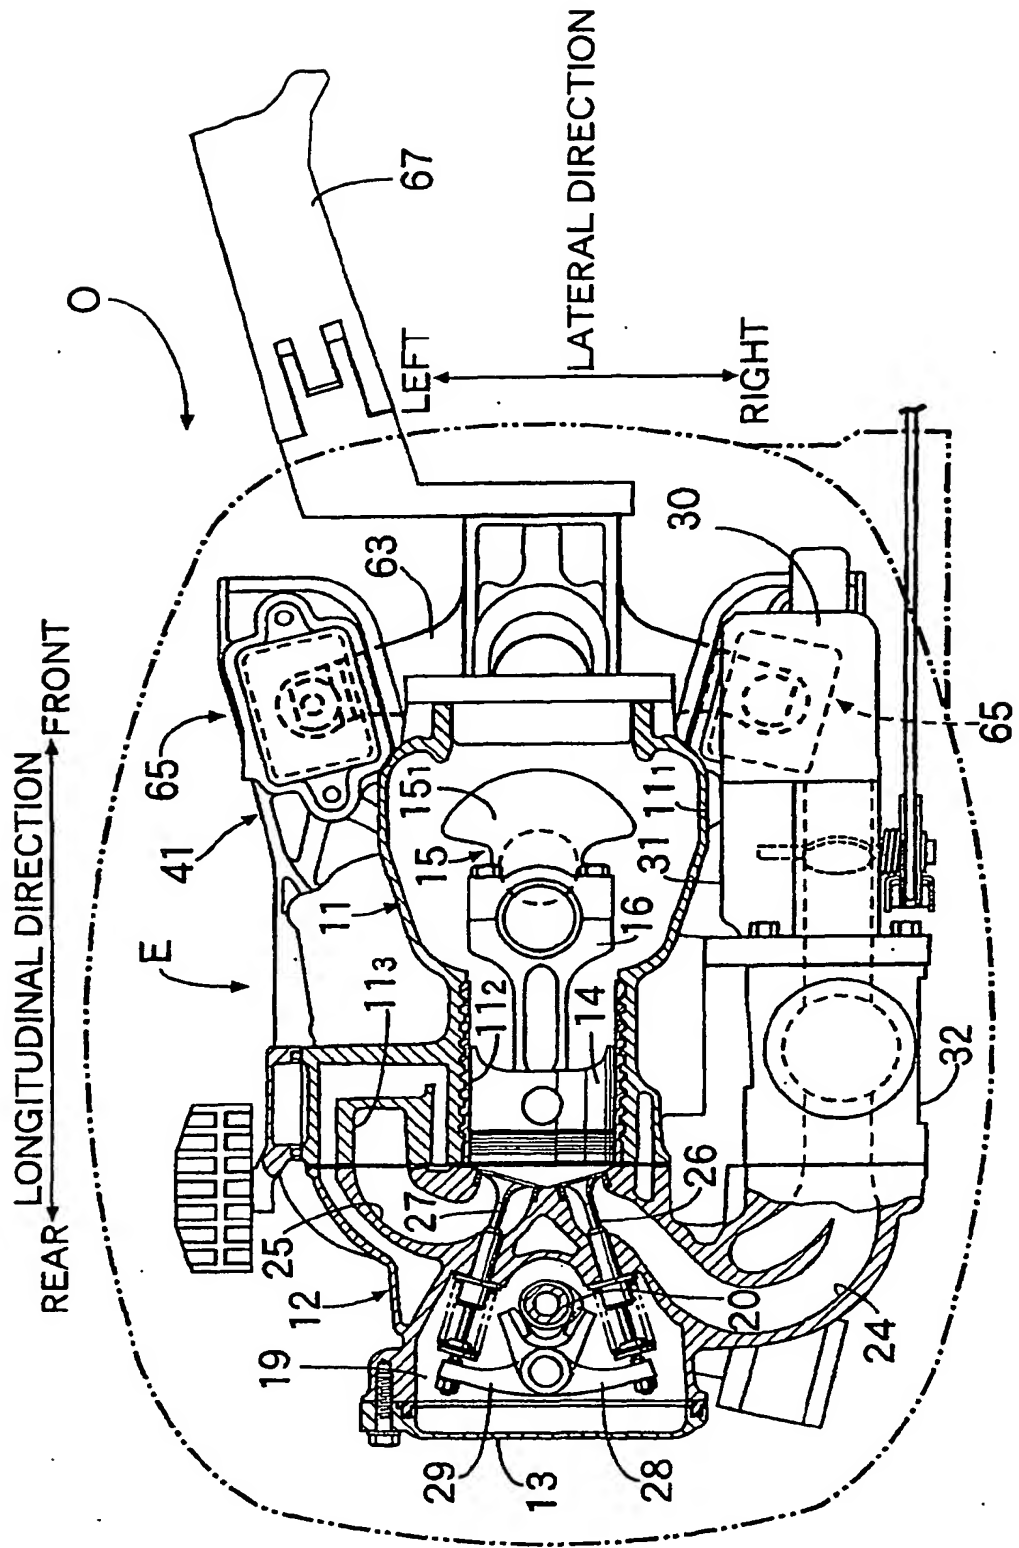


FIG.4

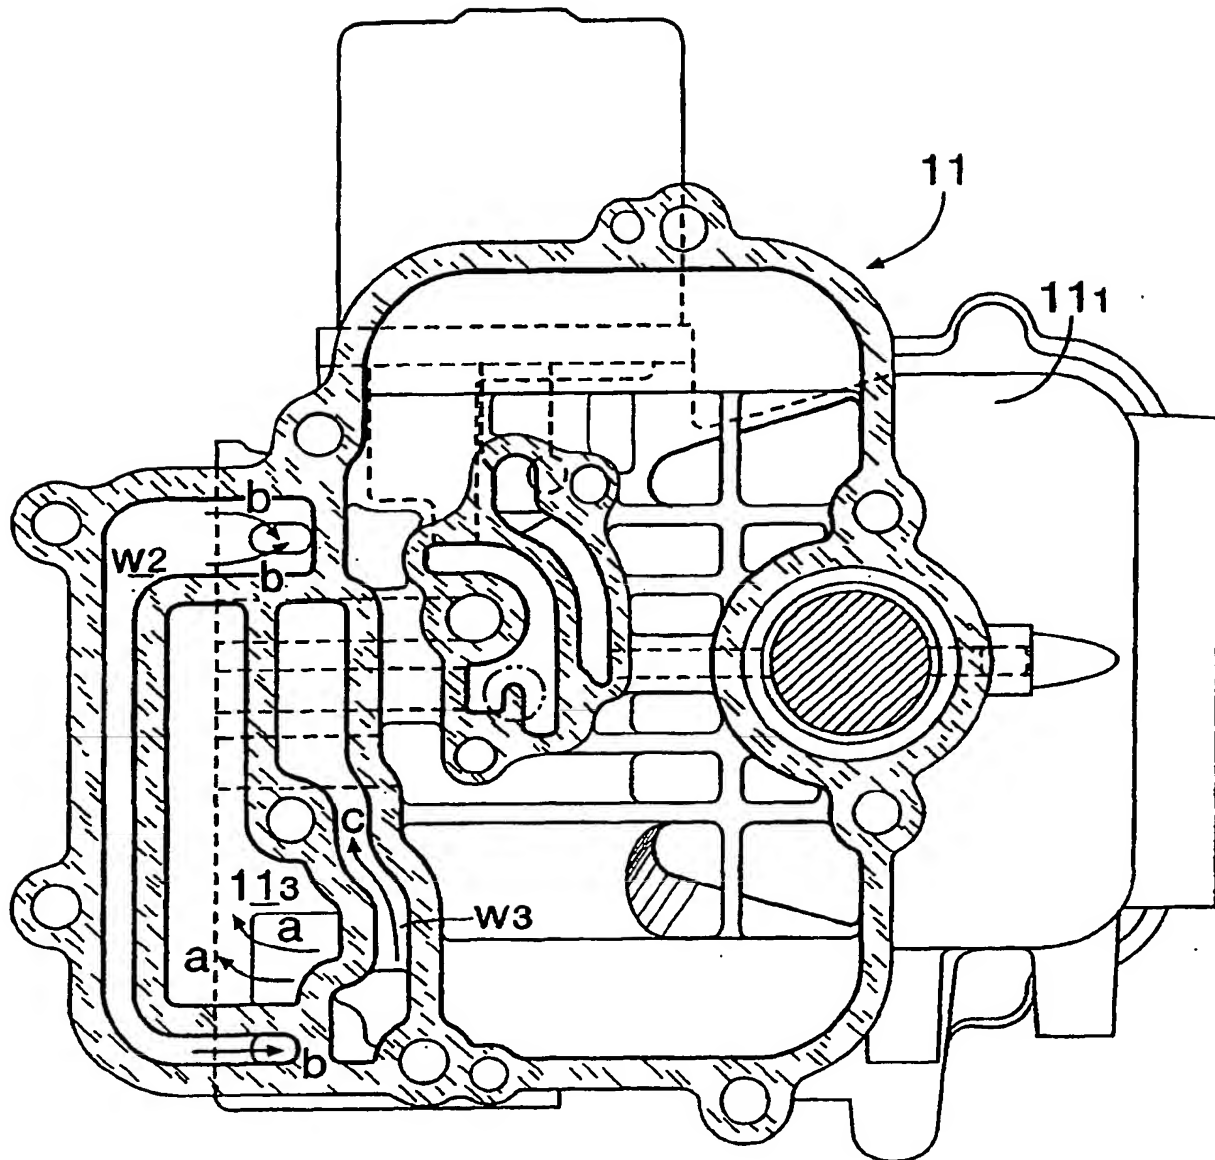


FIG.5

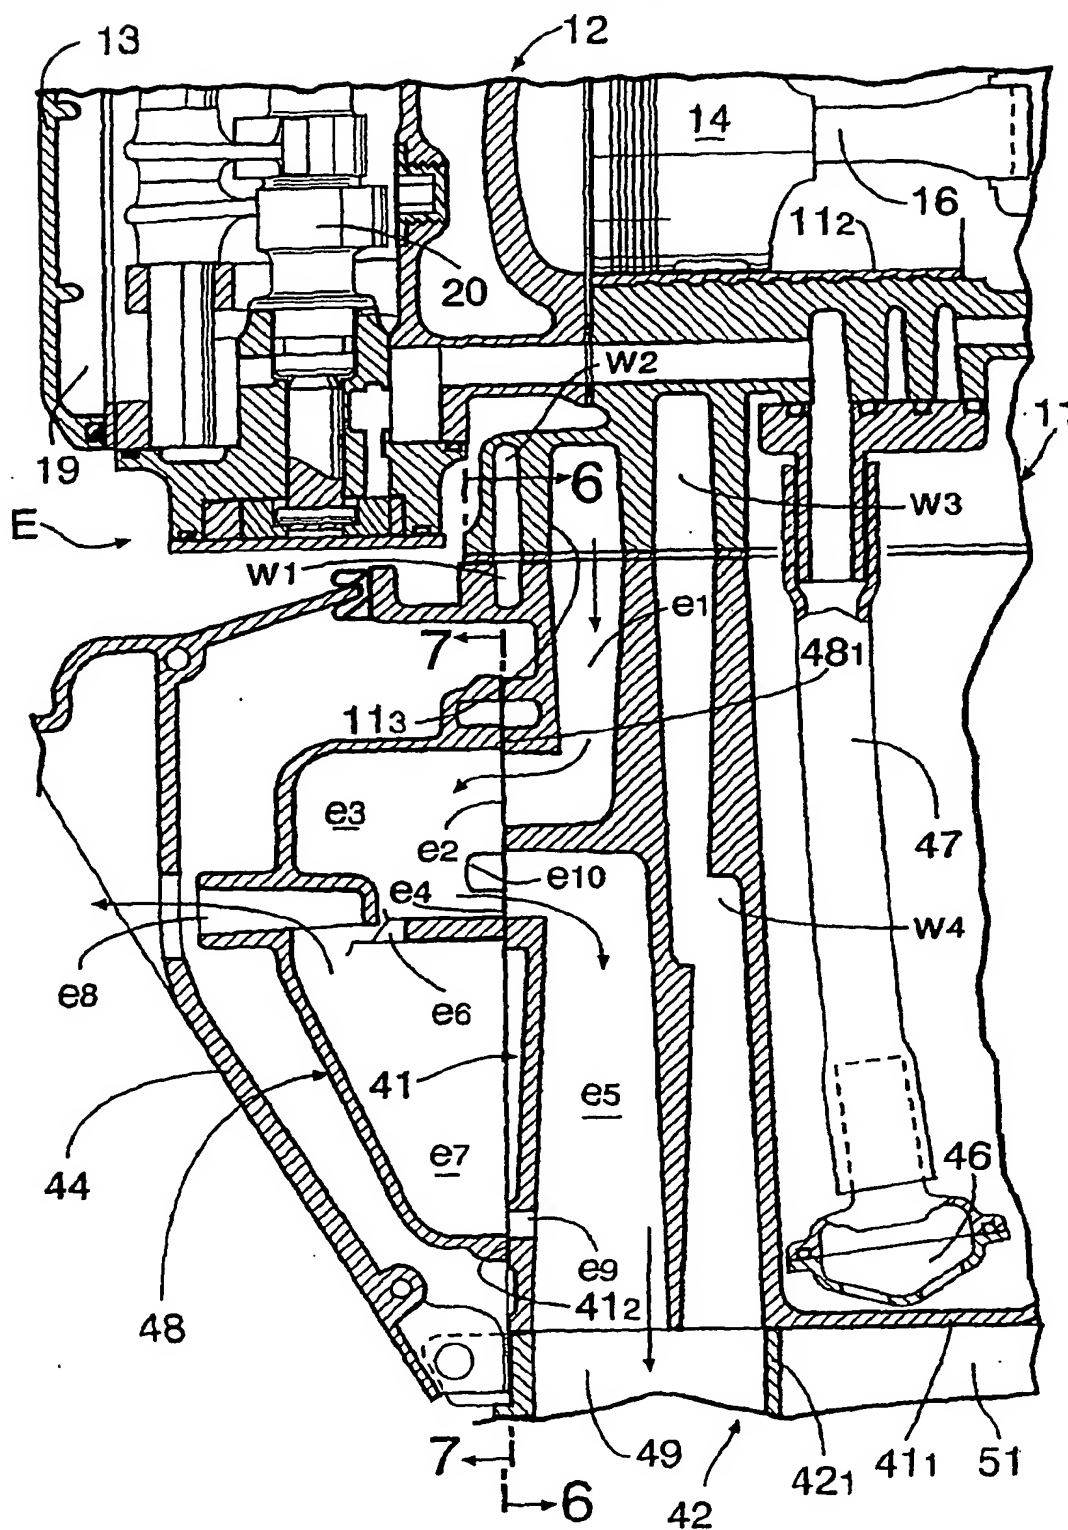


FIG.6

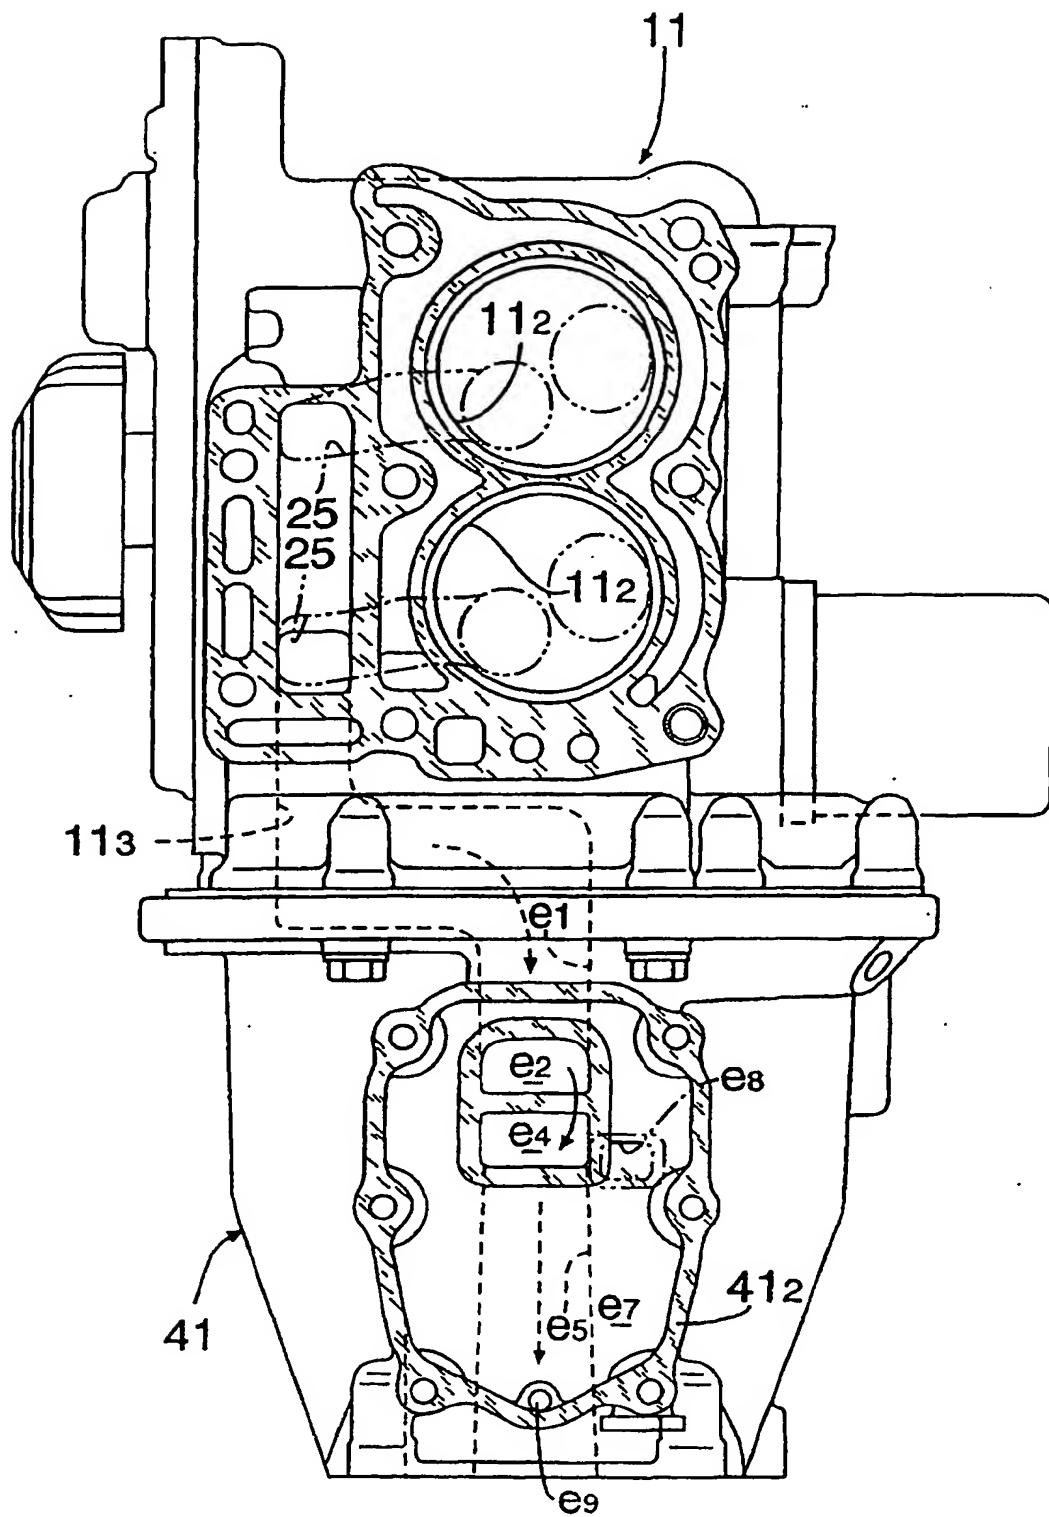


FIG.7

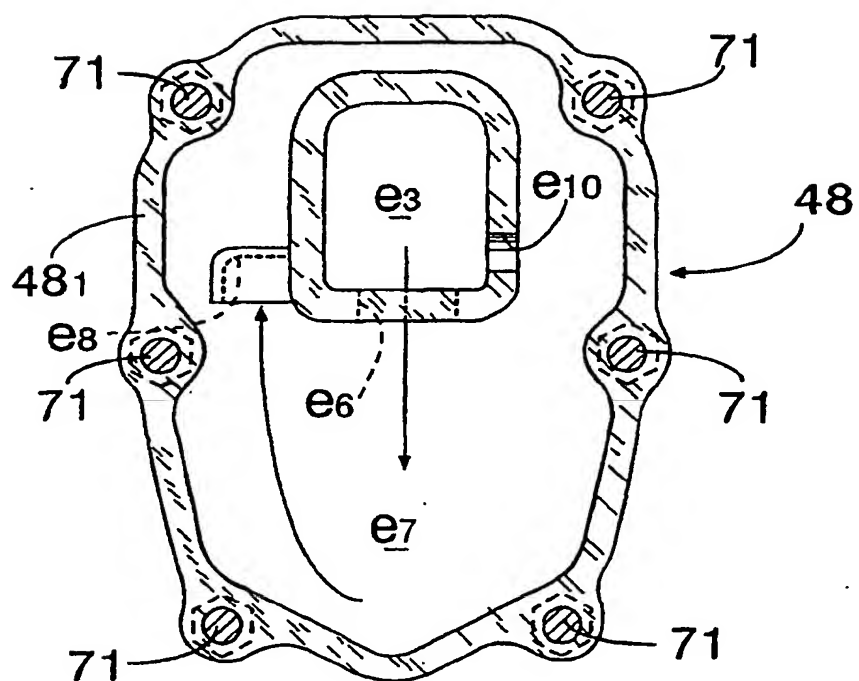


FIG.8

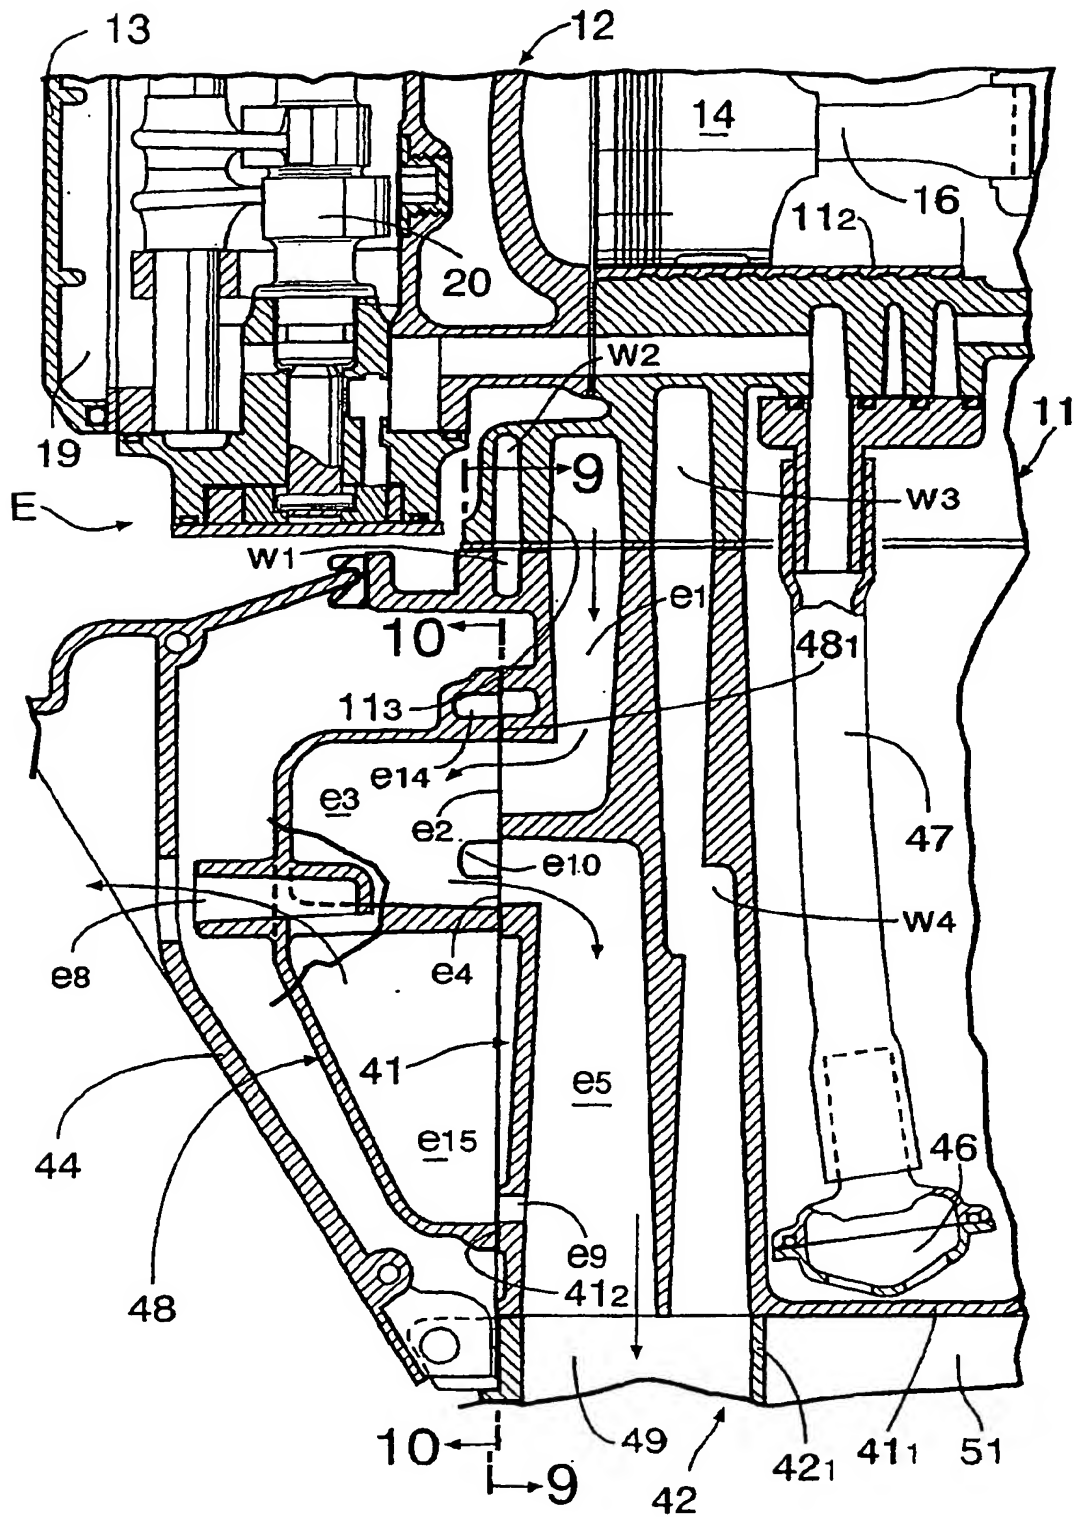


FIG.9

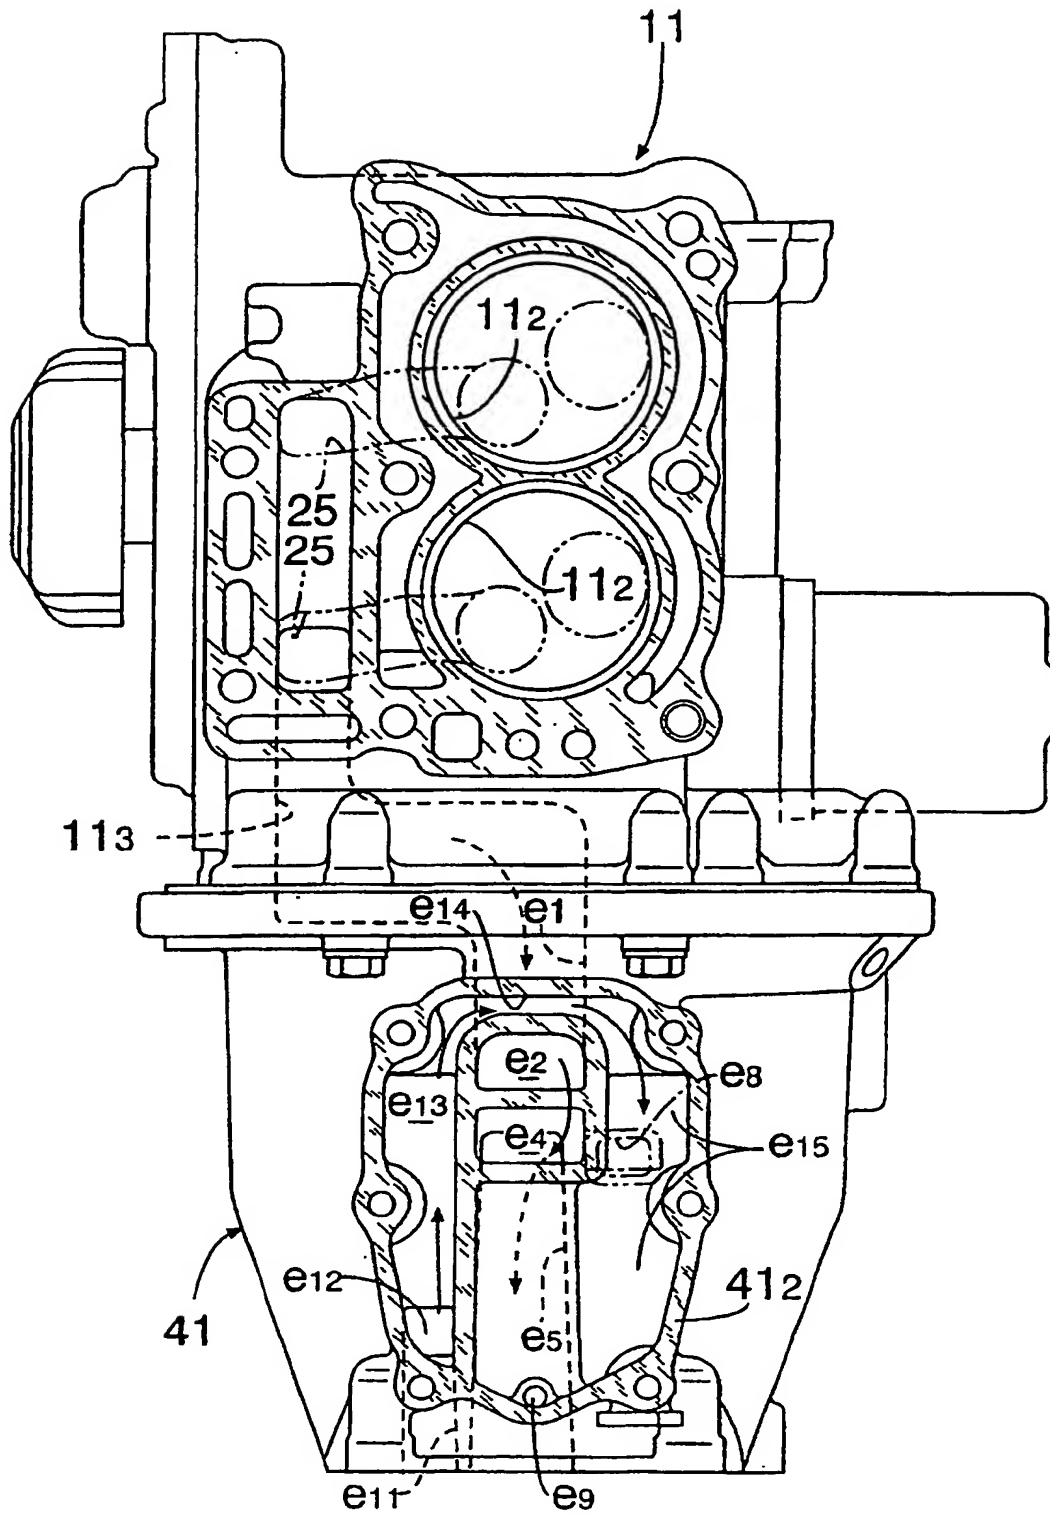


FIG.10

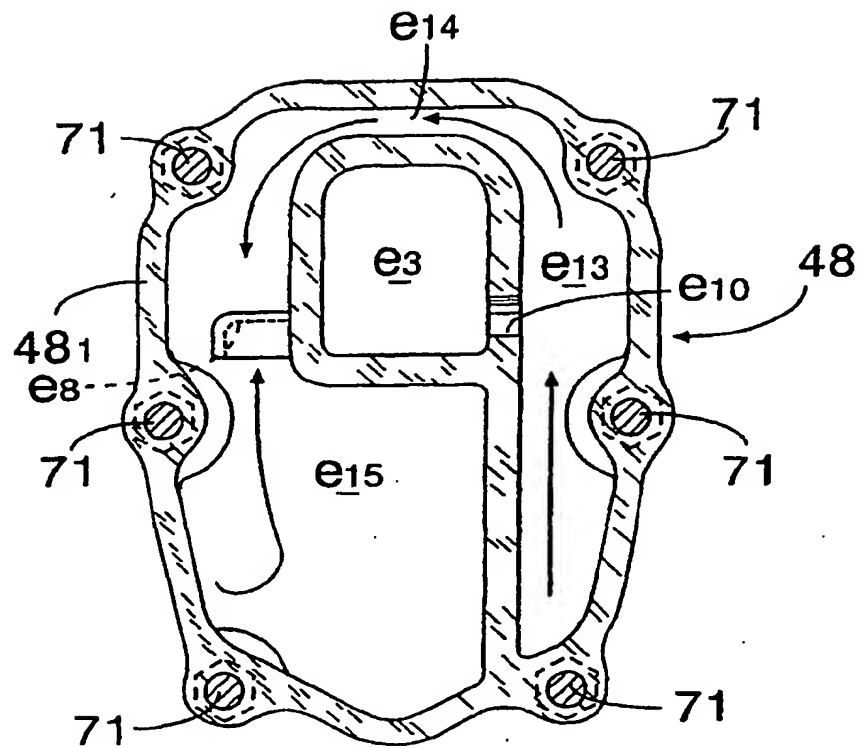


FIG. 11

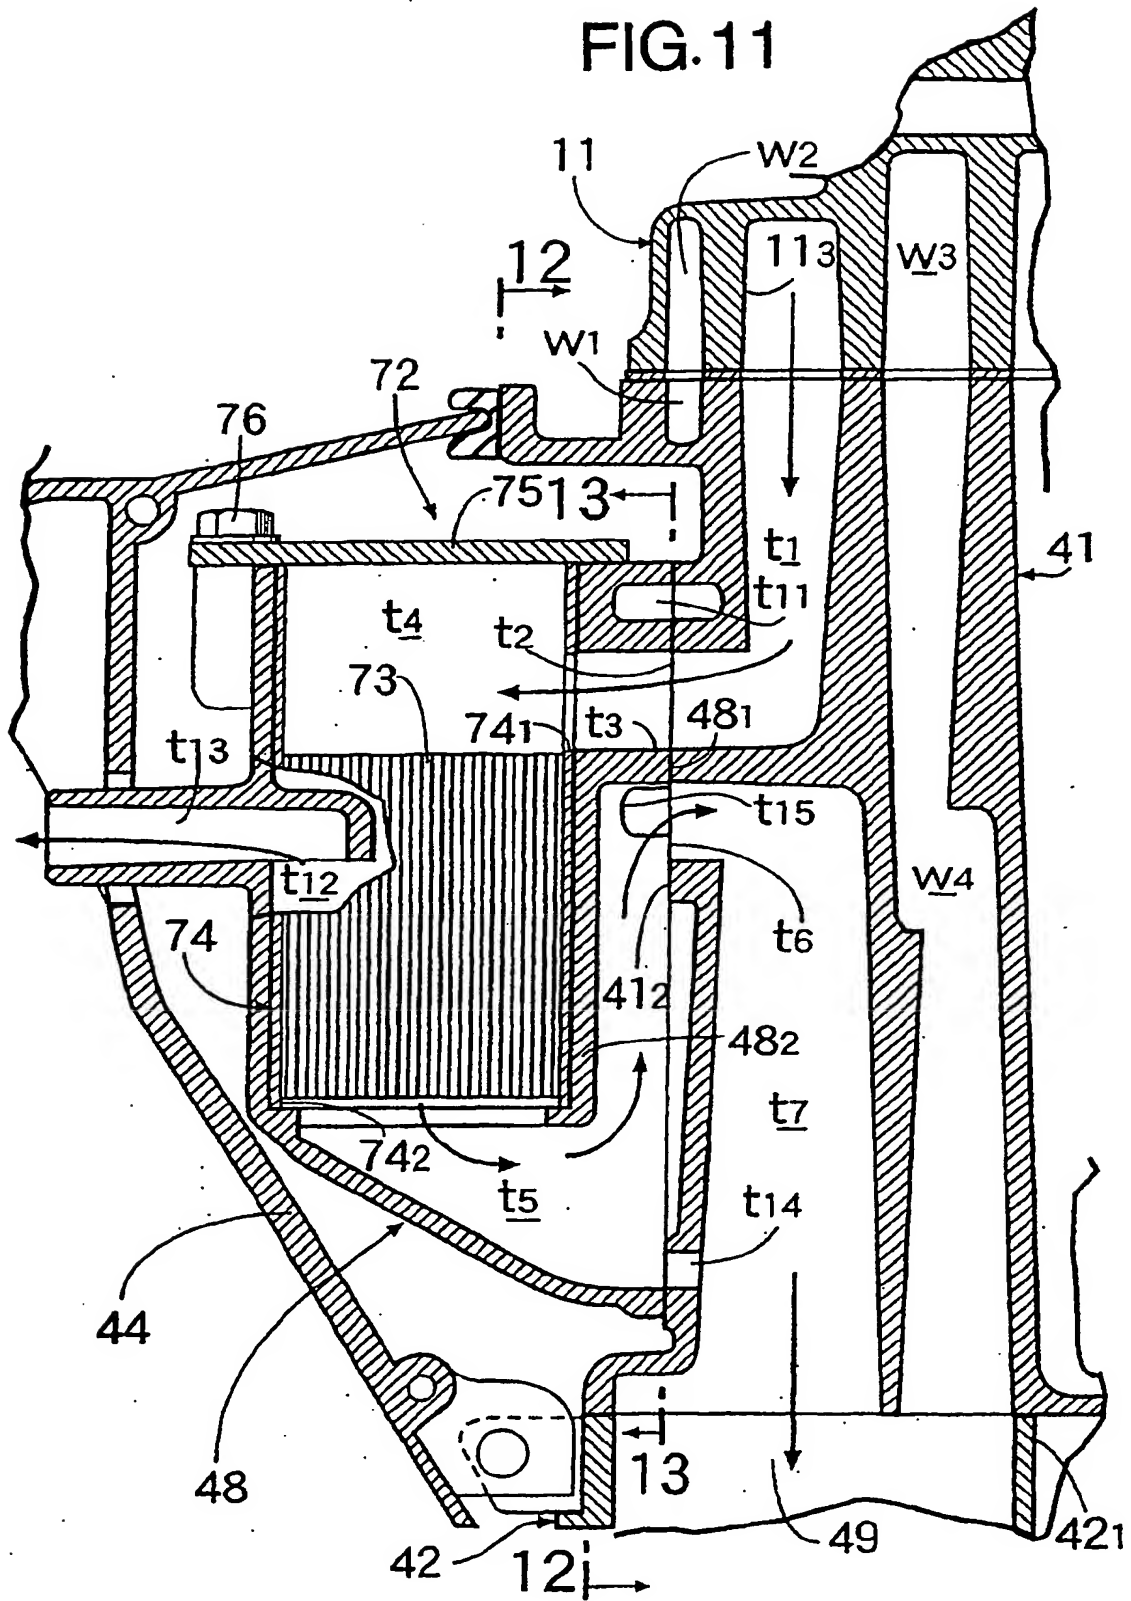


FIG. 12

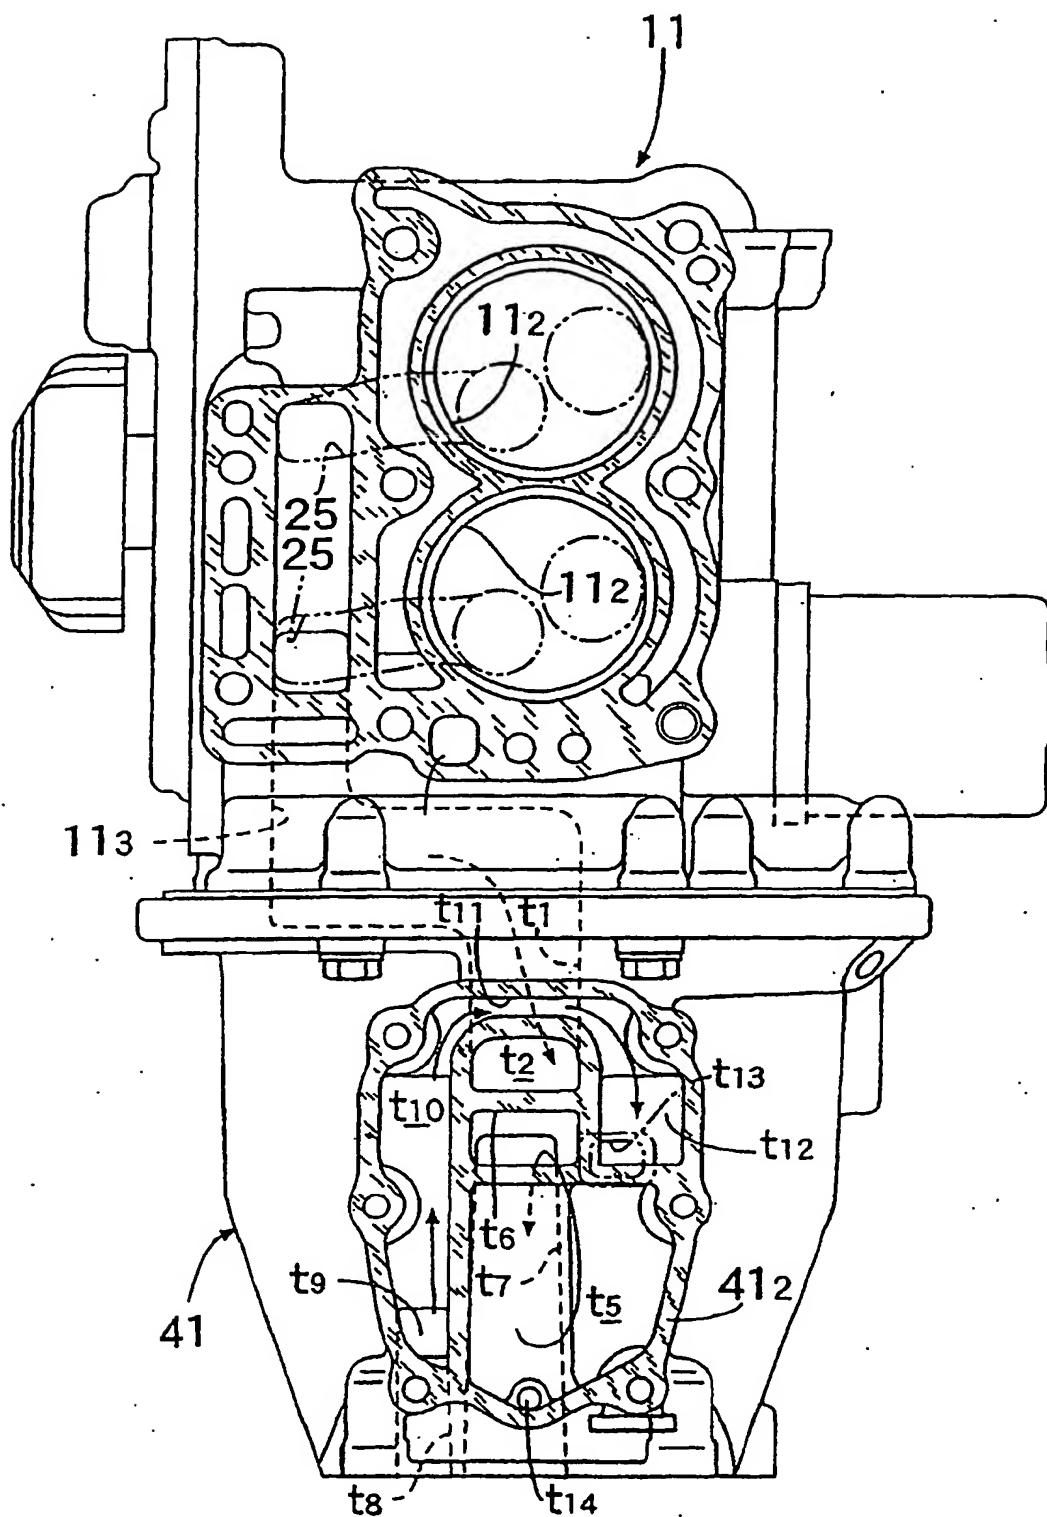


FIG. 13

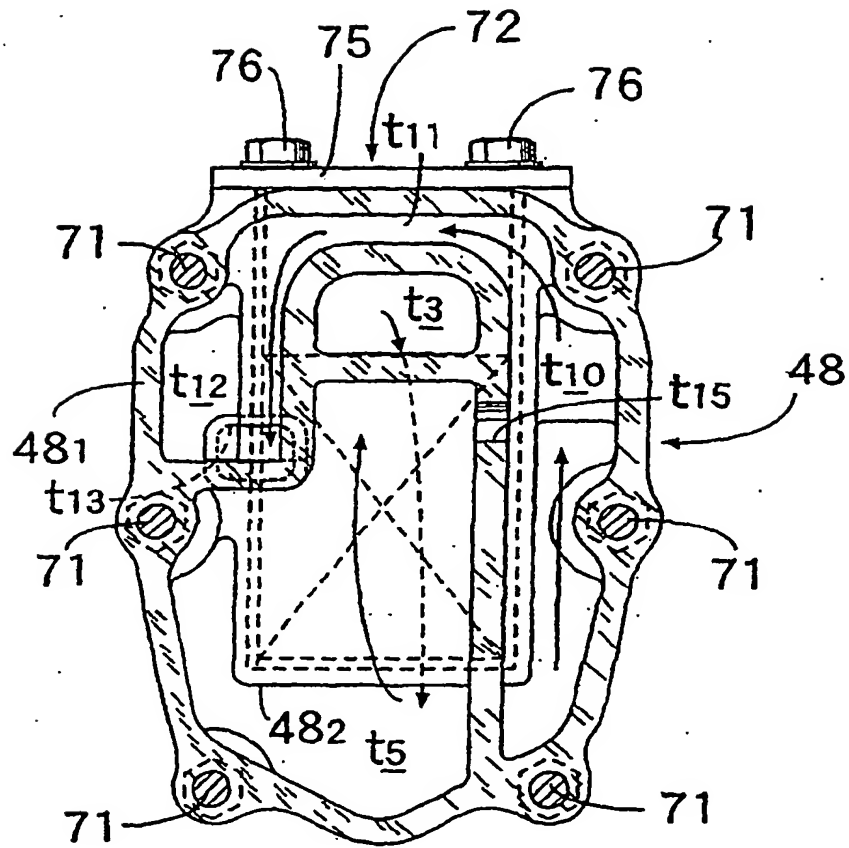


FIG.14


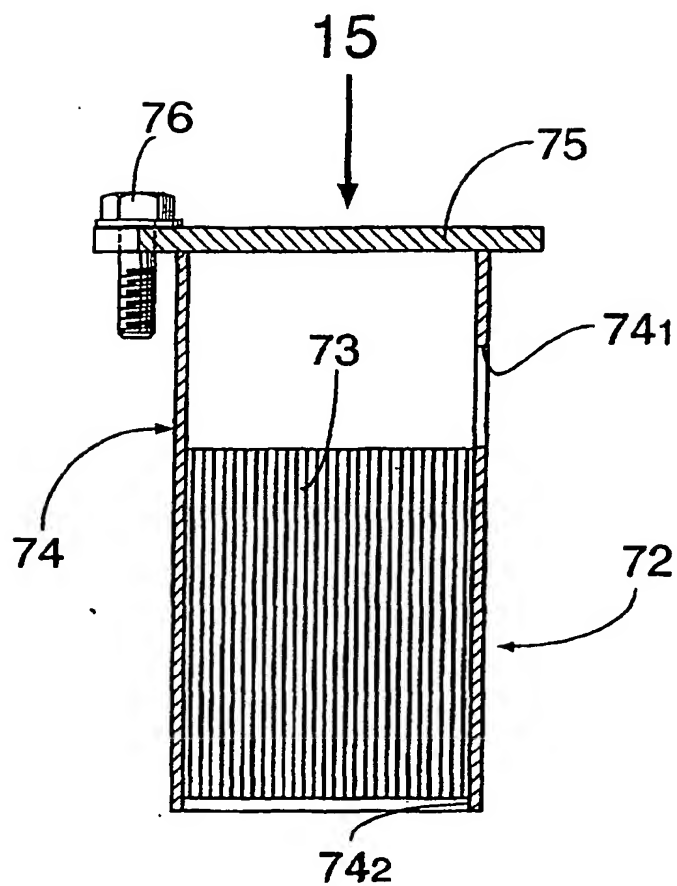


FIG.15

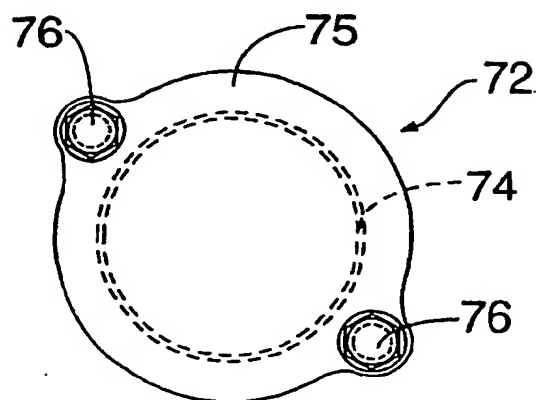

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/06533

| A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ F01N 7/18 | | |
|---|---|--|
| According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ F01N 7/18, 7/12, 3/28 | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2001 Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001 | | |
| Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| Y | JP, 63-212199, A (Sanshin Ind. Co., Ltd.), 05 September, 1988 (05.09.88), Full text; Figs. 4, 6 & US, 4811560, A | 1-2 |
| Y | JP, 07-081686, A (Honda Motor Co., Ltd.), 28 March, 1995 (28.03.95), Full text; Figs. 2 to 4 & DE, 4432915, A | 1-2 |
| Y | JP, 06-159073, A (Sanshin Ind. Co., Ltd.), 07 June, 1994 (07.06.94), Full text; Figs. 1, 2 & US, 5378180, A | 3-6 |
| <input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex. | | |
| * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed | | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family |
| Date of the actual completion of the international search 15 January, 2001 (15.01.01) | | Date of mailing of the international search report 23 January, 2001 (23.01.01) |
| Name and mailing address of the ISA/ Japanese Patent Office | | Authorized officer |
| Facsimile No. | | Telephone No. |

Form PCT/ISA/210 (second sheet) (July 1992)